



呼び径	S	d	L	H1	h1	h2	H	質量(kg)	Cv値	操作機型式		ランク
15 A	Rc 1/2	13	59	52	36	58	151	1.5	9	AM1-030	AM2-030	0
20 A	Rc 3/4	15	66	54	36	58	153	1.6	13	AM1-030	AM2-030	0
25 A	Rc 1	20	78	61	36	58	160	1.8	24	AM1-070	AM2-070	0
					53	85	201	2.3		AM1-180	AM2-180	2
32 A	Rc1 1/4	25	87	71	36	58	170	2.1	44	AM1-070	AM2-070	0
					53	85	211	2.6		AM1-180	AM2-180	2
40 A	Rc1 1/2	32	95	77	53	85	217	3	80	AM1-180	AM2-180	0
50 A	Rc 2	40	109	83	53	85	223	3.6	120	AM1-180	AM2-180	0

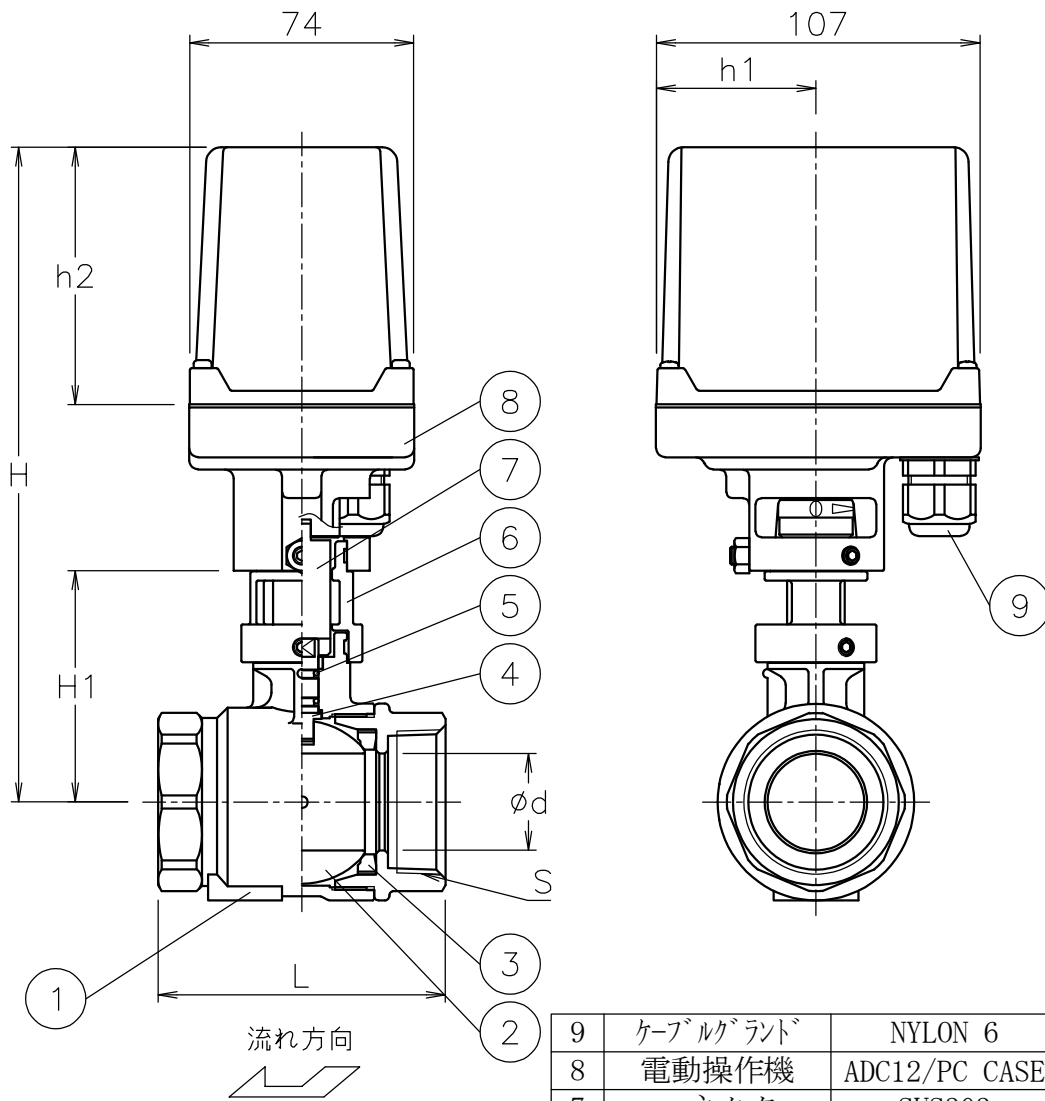

NOTE

(a) ケーブルグランドの適合ケーブル外径はφ5~10.5

9	ケーブルグランド	NYLON 6	1	G 3/8 (a)
8	電動操作機	ADC12/PC CASE	1	
7	コネクタ	SUS303	1	
6	ブラケット	SCS13A	1	
5	Oリング	耐蒸気FKM	2	
4	ステム	SUS316	1	メッキ
3	シート	強化PTFE	2	
2	ボール	SCS14A	1	
1	本体	SCS14A	1	
No	DESCRIPTION	MATERIALS	REQ'D	REMARKS

			APPR'D	H. F	TITLE	Rcねじ込み形 EG型モータボールバルブ					
			CHK'D	K. Y		MODEL	AM1EG**5UUP AM2EG**5UUP				
			DESIGN		SCALE		NON	DWG No.	EG-*5UUP-AM7		
MARK	DATE	BY	DATE	'21-03-23							
REVISIONS			 NIPPON VALVE CONTROLS, INC.								
MV-2890											