


呼び径	S	d	L	W	N	N1	H	質量(kg)	Cv値	操作機型式		ランク
15 A	Rc 1/2	17	59	106	57	30	95	0.8	7	PSO-03S	PSC-03S	0
20 A	Rc 3/4	23	66	106	57	30	98	0.9	19	PSO-03S	PSC-03S	0
25 A	Rc 1	28	78	160	57	30	111	1.2	28	PSO-03D	PSC-03D	0
32 A	Rc1 1/4	31	87	160	57	30	111	1.4	28	PSO-03D	PSC-03D	0
40 A	Rc1 1/2	43	95	185	68	36	140	2.2	86	PSO-04D	PSC-04D	0
50 A	Rc 2	48	109	185	68	36	140	2.7	86	PSO-04D	PSC-04D	0

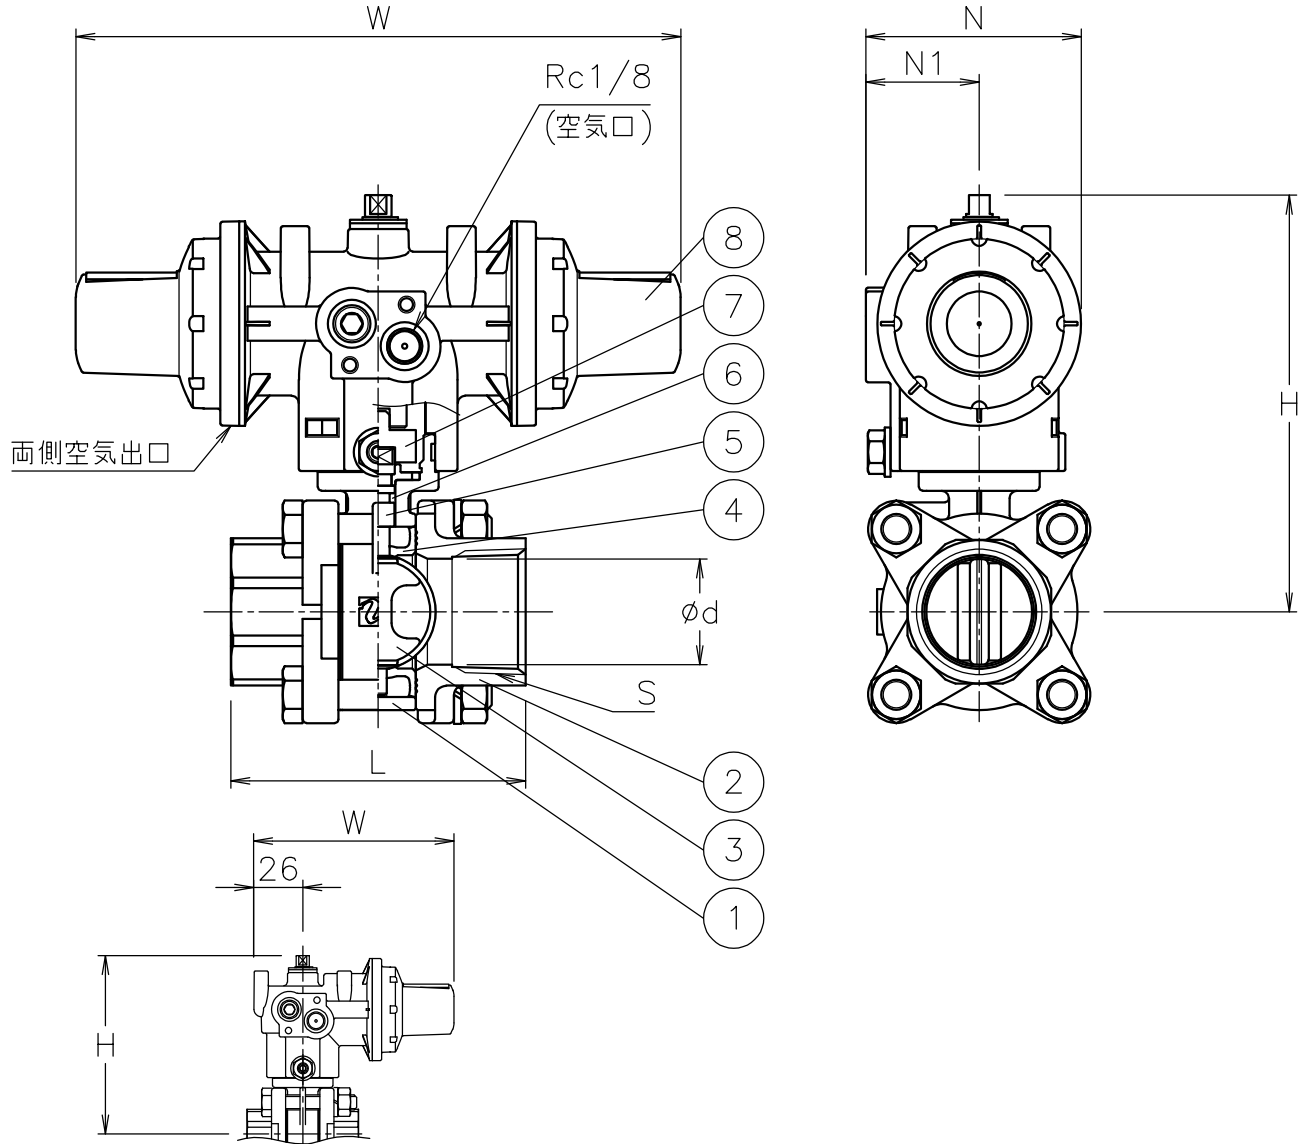

PS*Z-905TUB-015

PS*Z-905TUB-020

NOTE

- ① 標準操作圧力: 0.4~0.5MPa 最大0.7MPa
 ② 操作機動作

	空気導入	空気排出 (スプリング)
PSO	開	閉
PSC	閉	開

8	エア作動操作機	PPSボディー	1	PSO/C
7	コネクタ	SUS304/PPS樹脂	1	
6	Oリング	NBR	1	
5	ステム	SUS316	1	
4	シート	NBR	1	
3	弁体	PPS樹脂	1	
2	キャップ	SCS14A	2	
1	本体	SCS13A	1	
No	DESCRIPTION	MATERIALS	REQ'D	REMARKS

			APPR'D	K. Y	TITLE	Rcねじ込み形 (単作動形) Z型エア作動バタフライバルブ						
			CHK'D	K. Y								
			DESIGN		MODEL	PSOZ-905TUB PSCZ-905TUB						
			DRAWN	S. O								
MARK	DATE	BY	DATE	'23-11-28	SCALE	NON	DWG No.	Z-905TUB-DA2				
REVISIONS			 NIPPON VALVE CONTROLS, INC.									
MV-3040												