




Size [mm]	d	L	L1	D	C	n-h	W1	W2	φK	H2	Weight [kg]	Actuator	Reduction ratio
65	65	190	85	175	140	4-19	157	45	150	140	17	MAG-F07	24:1
80	80	203	97	185	150	8-19	157	45	150	152	20	MAG-F07	24:1
100	100	229	109	210	175	8-19	240	63	300	180	34	MAG-F10	30:1
125	125	356	150	250	210	8-23	240	63	300	198	52	MAG-F10	30:1
150	150	394	152	280	240	8-23	226	78	300	221	75	MAG-F12	50:1

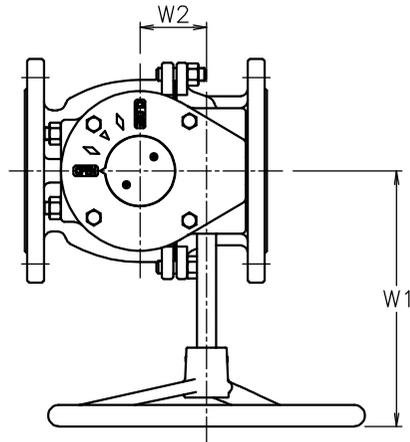

NOTE

- Materials include equivalents

(a) Handle removed for shipment

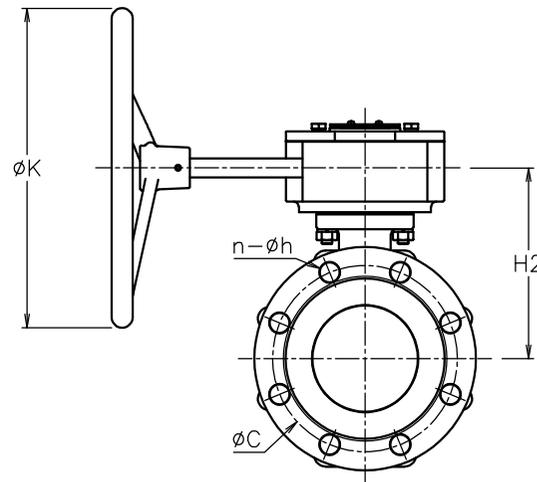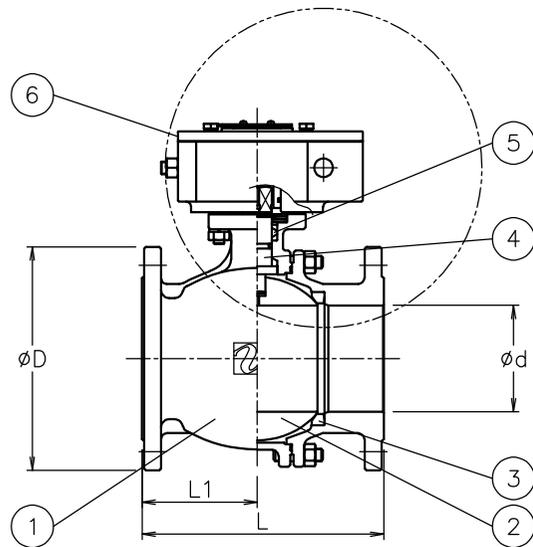

No	DESCRIPTION	MATERIALS	REQ'D	REMARKS
6	Worm gear		1	(a)
5	Packing	R-PTFE	1set	
4	Stem	SUS304	1	
3	Seat	R-PTFE	2	
2	Ball	SCS13A	1	
1	Body	SCS13A	1	

			APPR'D	K.Y	TITLE	J10K Flanged-end BR type Ball valve			
			CHK'D	K.Y					
			DESIGN		MODEL	MAXBRG-1TTG			
			DRAWN	S.O					
MARK	DATE	BY	DATE	'26-02-16	SCALE	NON	DWG No.	BR-1TTG-G-MA8-EN	
REVISIONS									
MV-3155									

**NIPPON VALVE CONTROLS, INC.**