
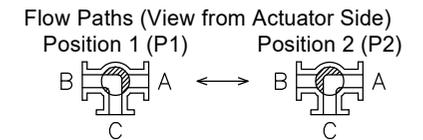
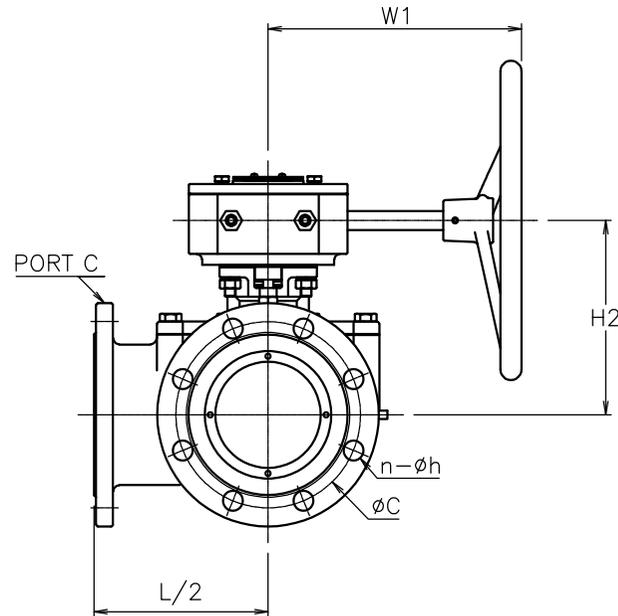
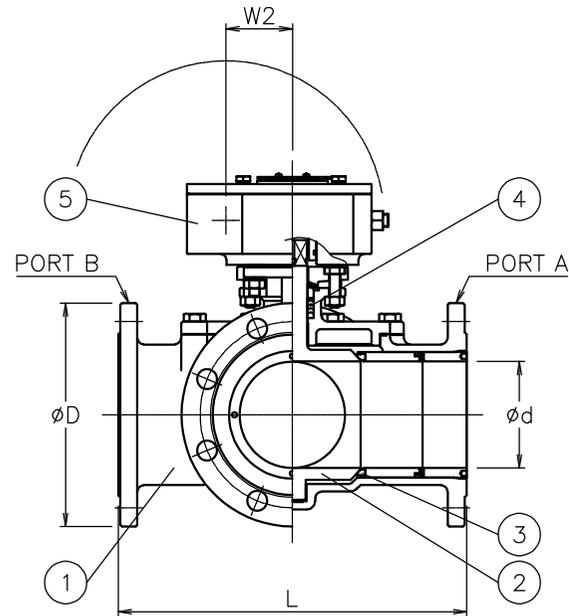


Size [mm]	d	L	D	C	n-h	W1	W2	φK	H2	Weight [kg]	Cv P1/P2	Actuator	Reduction ratio
65	65	240	175	140	4-19	157	45	150	150	23	240	MAG-F07	24:1
80	76	260	185	150	8-19	157	45	150	158	27	380	MAG-F07	24:1
100	100	330	210	175	8-19	240	63	300	184	44	680	MAG-F10	30:1
125	122	370	250	210	8-23	240	63	300	202	59	1080	MAG-F10	30:1
150	145	430	280	240	8-23	226	78	300	224	85	1620	MAG-F12	50:1

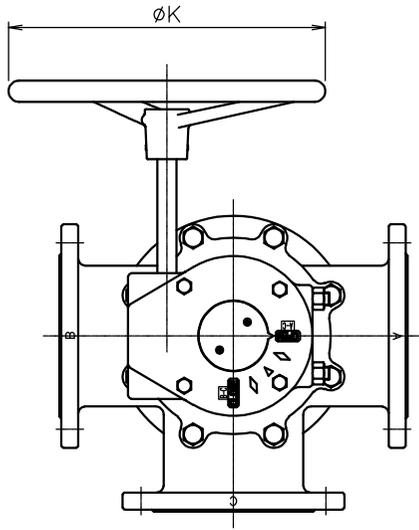

5	Worm gear		1	(a)
4	Packing	PTFE	1set	
3	Seat	R-PTFE	2	
2	Ball • Stem	SCS13A	1	
1	Body	SCS13A	1	
No	DESCRIPTION	MATERIALS	REQ'D	REMARKS

NOTE
• Materials include equivalents

(a) Handle removed for shipment

			APPR'D	K.Y	TITLE	J10K Flanged-end L3 type 3 way ball valve			
			CHK'D	K.Y	MODEL	MAXL3G-1TTG			
			DESIGN		SCALE	NON	DWG No.	L3-1TTG-G-MA4-EN	
			DRAWN	S.O					
MARK	DATE	BY	DATE	'26-02-12					
REVISIONS									
MV-3152									