
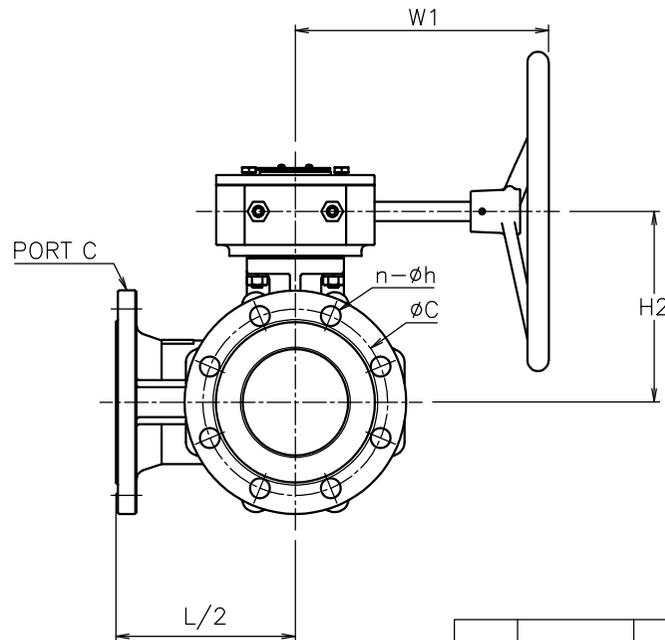


Size [mm]	d	L	D	C	n-h	W1	W2	$\phi K$	H2	Weight [kg]	Cv P1/P2	Actuator	Reduction ratio
65	65	260	175	140	4-19	157	45	150	140	23	240	MAG-F07	24:1
80	80	280	185	150	8-19	157	45	150	152	25	380	MAG-F07	24:1
100	100	340	210	175	8-19	240	63	300	180	42	680	MAG-F10	30:1

**NOTE**

• Materials include equivalents

(a) Handle removed for shipment

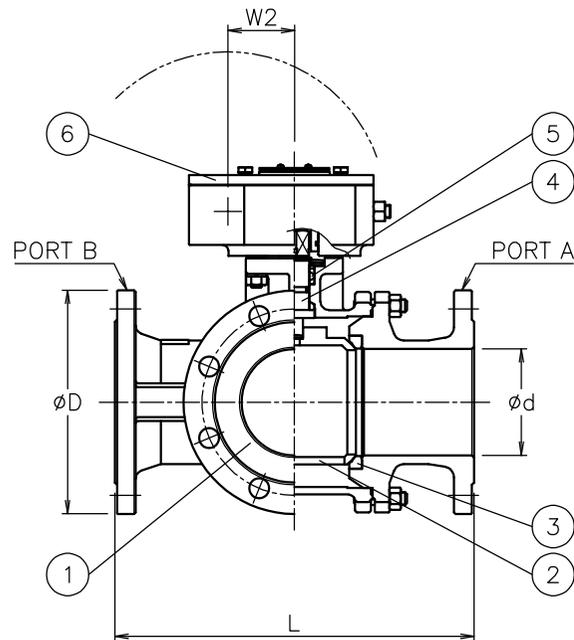

**Flow Paths (View from Actuator Side)**

Position 1 (P1)

Position 2 (P2)



No	DESCRIPTION	MATERIALS	REQ'D	REMARKS
6	Worm gear		1	(a)
5	Packing	R-PTFE	1set	
4	Stem	SUS304	1	
3	Seat	R-PTFE	2	
2	Ball	SCS13A	1	
1	Body	SCS13A	1	

			APPR'D	K.Y	TITLE	J10K Flanged-end LR type 3 way ball valve					
			CHK'D	K.Y							
			DESIGN		MODEL	MAXLRG-1TTP					
			DRAWN	S.O							
MARK	DATE	BY	DATE	'26-02-13	SCALE	NON	DWG No.	LR-1TTP-G-MA5-EN			
REVISIONS											
MV-3154											