



Size [mm]	S	d	L	H1	P	W	N	N1	H	Weight [kg]	Actuator	Sizing code
15	Rc 1/2	16	63	44	1/8	110	57	32	134	1.5	TAD-040	0
20	Rc 3/4	20	72	51	1/8	110	57	32	140	1.6	TAD-040	0
25	Rc 1	25	86	61	1/8	110	57	32	151	1.9	TAD-040	0
32	Rc1 1/4	32	96	80	1/4	170	82	36	203	2.8	TAD-050	0
40	Rc1 1/2	38.1	104	86	1/4	170	82	36	209	3.3	TAD-050	0

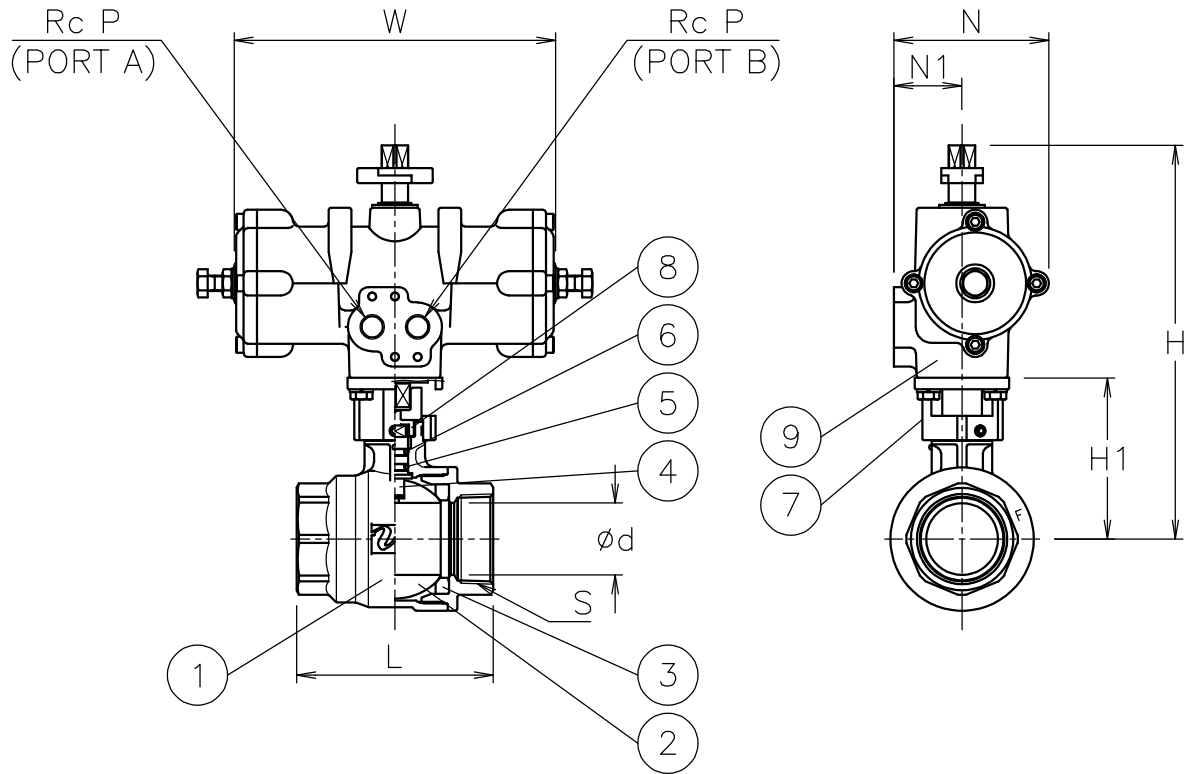

NOTE

- 1) Air supply: 0.4 to 0.5 Mpa. Max 0.7 Mpa.
- 2) Actuator operation
 Air to port A: SHUT
 Air to port B: OPEN

9	Actuator		1	TAD
8	Joint	SUS304	1	
7	Bracket	ZDC2	1	
6	O-ring	NBR	1	
5	O-ring	FKM	1	
4	Stem	SUS316	1	Cr plated
3	Seat	PTFE	2	
2	Ball	SCS14A/SUS316	1	
1	Body	SCS14A	1	
No	DESCRIPTION	MATERIALS	REQ'D	REMARKS

			APPR'D	K.Y	TITLE	Threaded End Rc (double-acting type) EJ type pneumatic actuated ball valve						
			CHK'D	K.Y								
			DESIGN		MODEL	TADEJ905UUT						
			DRAWN	S.O								
MARK	DATE	BY	DATE	'24-03-08	SCALE	NON	DWG No.	EJ-905UUT-TA1-EN				
REVISIONS			 NIPPON VALVE CONTROLS, INC.									
MV-3053												